


JC 6, 8, 9 CABLE SUPPORTS

S.099/00066 for JC6, JC8, J8, and JC9, pits.

- Replacement to fit fibro cement pits.




P6/P9 Pit CABLE SUPPORTS

- Supplied with the pit in the form 2 lengths of 35mm diameter plastic pipe.

P6/P9 CABLE SUPPORT REPLACEMENT


- Replacement for 35mm pipe. Wearing gloves, cut 50mm conduit to length (510mm) then cut a Vee notch at one end 20mm deep by 25mm wide. Insert straight end over inner knob (towards the centre) press notched end over inner knob on the opposite side (using notch to position conduit). Rotate conduit so that the notch faces downwards.

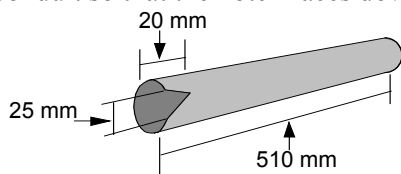

HSJ CONTINUOUS SUPPORT BAR

S.099/00176


- 40mm wide x 3.3mm thick x 2.1m long, black synthetic strip for housing HSJ joint closures in all pit sizes (To be phased in as metal support bars are phased out).
- Cut to the required length with a hacksaw to suit the pit width. Use gloves and where necessary a dust mask.
- Keep off cuts for smaller pits.

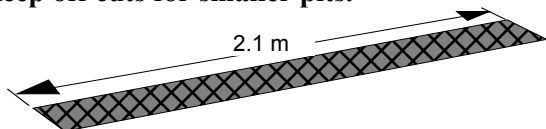

HSJ METAL SUPPORT BARS

S.433/00219 to 00224 & 00262

- For housing HSJ joint closures in the following pit sizes: 1, 2, 3, 4, and 6/8/9 (To be phased out).

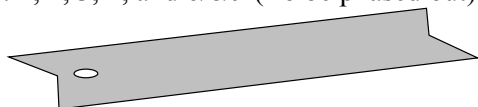


PIT COVER SEAL BREAKERS

S.116/00113 Long Body

S.116/00115 Short Body


- Use to loosen jammed pit covers.
- DO NOT USE THE SEAL BREAKER TO LIFT THE COVER.** Only use a manhole key to lift cover.

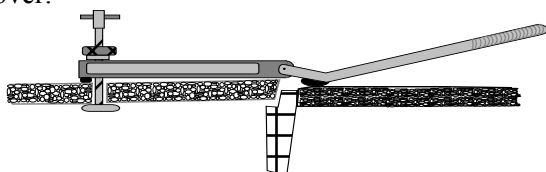

MANHOLE KEY

S.116/00150 to 00153.

- Four sizes of M/H key allow the appropriate length to be used to match the height of the worker.
- Use correct lifting techniques.

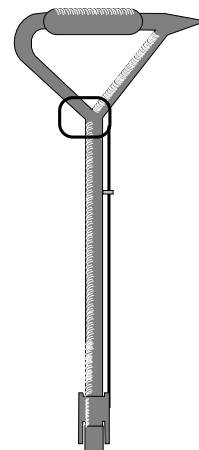

PIT GASKET

S.099/00001 - for P2 pit

S.099/00002 - for P3 pit


S.099/00003 - for P4 pit

S.099/00177 - for P5 pit

S.099/00164 - for P6, 8 & 9 pit

Use gaskets to:

- Reduce silting and entry of unwanted material in new estates. ie new work.
- Prevent syringes or other hazardous objects being placed in the pit in identified problem areas.
- Reduce pit cover wobble for some existing pits.

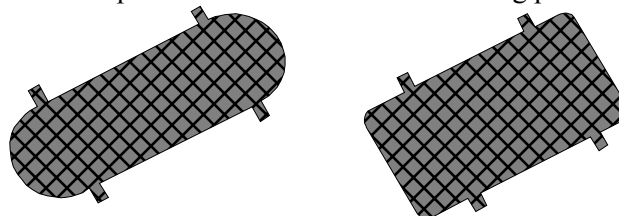


Keyhole Plugs - Lockable Plastic Plugs


Note: Generally, Fix & Fit staff are not required to fit gaskets unless directed in identified problem areas.

Serial/Item.	To fit pit size.
S.075/00117	Stainless steel key for removing plugs. Key fits all plastic plugs.
S.075/00118	For J1 or P1.
S.075/00119	For J2 or P2.
S.075/00120	For J3, P3, J4, P4, P5, J6, P6, J8 & J9.
S.075/00121	For cast iron or steel covers or any cover with a plate thickness of 10mm.
S.075/00122	For cast iron or steel covers or any cover with a plate thickness of 12mm.
S.075/00123	For cast iron or steel covers or any cover having a plate thickness of 6mm.

Stainless Steel Key

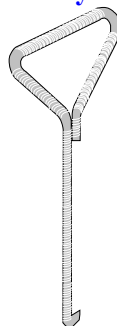

Lockable Plastic Plugs

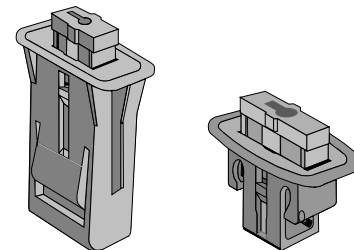

- Use lockable plastic plugs in all commercial areas or where vandalism is a problem or where objects (syringes) are often inserted into pits.

INTENTIONALLY BLANK